



## FIREPLACE INSERTS

#### Refractories



#### **Symbols**

#### PRODUCT-SPECIFIC PICTOGRAPHS


<b>→</b>  ←	RLA, room air dependent
111	RLU, room air sealed, DIBt approval
*	Firewood
	S-Thermatik NEO
	S-USI II
	S-ESAM   S-ESAM 3.0
Ś₹	S-Kamatik   S-Kamatik 2
<b>6</b>	S-Vent
	Energy efficiency class
<b>((L))</b>	Output range (kW)
	Water-bearing stoves (kW)
	Water-heating-nominal heat output (kW)
	Straight
	Double sided
	L-shaped
	U-shaped
0	Round

CONTENTS	
Introduction	4 - 9
Product overview	10 - 11
Products	12 - 55
Technical data	58 - 61
CONT	ENT

#### NOTE:

- Colour deviations are possible due to printing. Colour and technical changes as well as errors excepted.



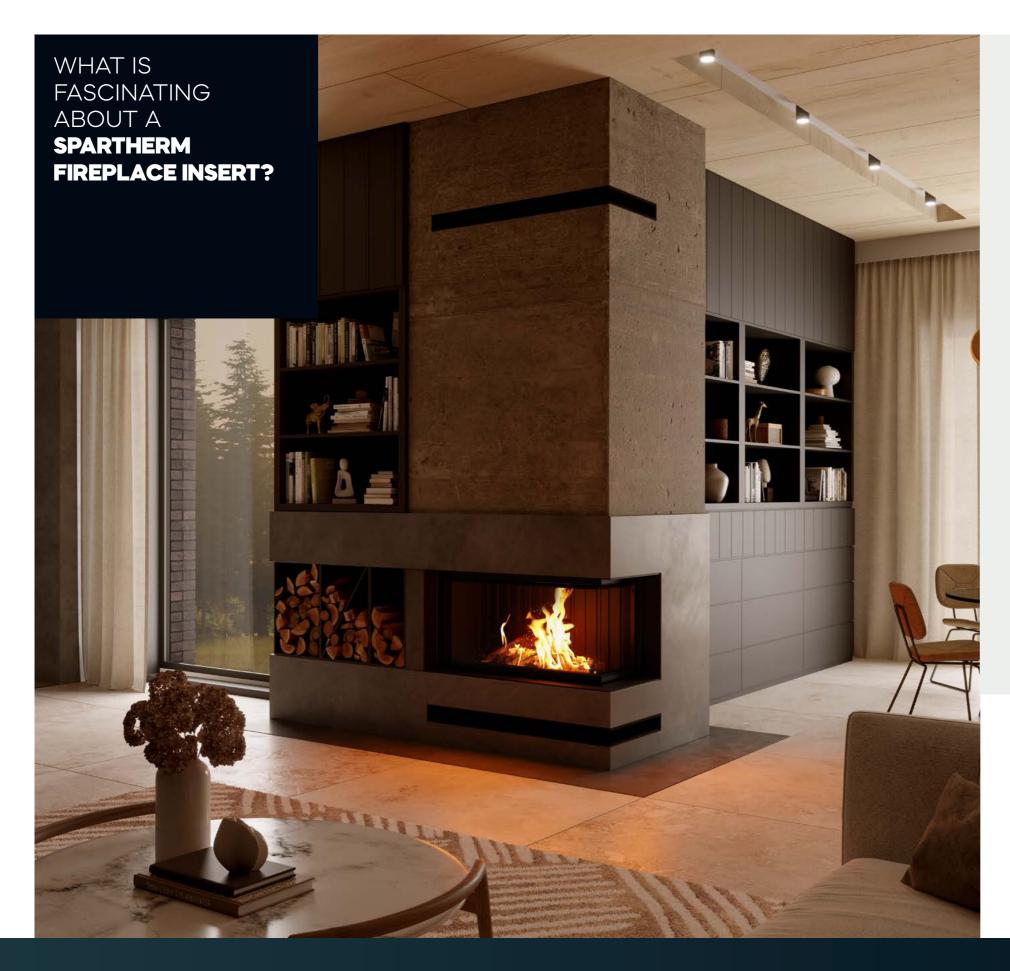

- JUST AS YOU WANT IT
- PRODUCTS FOR EVERY STYLE OF LIVING
- AN INDIVIDUAL FIREPLACE EXPERIENCE, FOR A LIFETIME

## LIVING STYLES – THE FIRE FOR EVERY STYLE

Whether minimalism, industrial chic or Skandi style: Furnishings that focus on design and quality are in vogue.


No wonder: If you limit yourself to the essentials in your own four walls and remove superfluous items, order and peace will return. This provides relaxation and helps make things slow down.

High-quality design classics suit this living trend well; they are durable and thus sustainable by nature.

Like the fireplace inserts from Spartherm.





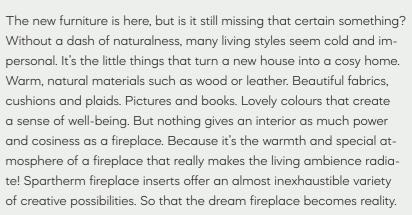


#### **MINI**

# Big fire experience - small effect. Variants: Mini R1V Mini R1V RLU Mini Z1 Mini Z1 RLU Mini Z1 NSHF Mini S Mini S RLU Mini Sh Mini Sh RLU

Page 12-15

Page 20-21



The fireplace with a view.  Variant:  Mini S-FDh
Mini S-FDh

Page 18-19


## **ARTE**

Page 16-17

Strai	ight				
Special formats for special room situations.					
Variants:					
Arte 1Vh-66	Arte 1Vh-66 RLU				

Arte Bh







O Round	
A round thing.	
Variant:	
Speedy Ph	
	Page 28-29

•			
-			
-			
-			
-			

#### **VARIA**

Straigh	nt
Excellent design for maximum integra	tion.
Variants:	
Varia 1V	Varia 1V RLU
Varia 1Vh	Varia 1Vh RLU
Varia 1V-87h	
Varia 1V-100h	
Varia Sh	Varia Sh RLU
Varia AS	Varia AS RLU
Varia ASh	Varia ASh RLU
Varia Ah	
Varia Bh	Varia Bh RLU
Varia B-120h	
Varia M-80h RLU	

Our bestsellers - flexible corner solu	utions.
Variants:	
Varia 2L-55	
Varia 2L-55h	Varia 2L-55h RLU
Varia 2R-55	
Varia 2R-55h	Varia 2R-55h RLI
Varia 2L-62	
Varia 2L-62h	Varia 2L-62h RLU
Varia 2R-62	
Varia 2R-62h	Varia 2R-62h RLI
Varia 2L-68h	
Varia 2R-68h	
Varia 2Lh	
Varia 2Rh	
Varia AS-2Lh	
Varia AS-2Rh	
Varia 2L-80h	
Varia 2R-80h	
Varia 2L-100h	
Varia 2R-100h	
	Page 36-41

Dou	ıble Sided
One fire - see it	twice.
Variants:	
Varia FD	Varia FD RLU
Varia FDh	
Varia FD-87h	
Varia AS-FDh	
Varia A-FDh	
Varia B-FDh	
	Page 42-47
☐ U-sl	Ţ
U-sl	haped
	haped
Fire in incompar	haped
Fire in incompar	haped

Page 48-49

Page 54-55

 $H_2O$ 



Page 50-51

Page 30-35



Page 52-53



#### **VARIANTS**

Mini R1V | RLU

**△** A+

(L) 4.5 - 6.8 kW 4.5 - 8.1 kW NSHF

Mini Z1 | RLU

₹**E** A

(**L**)) 4.9 - 9.1 kW

Mini Z1 NSHF

**≦** A+

((L)) 7.0 - 13.0 kW

Mini S | RLU

<u>₹</u> A

(**L**)) 4.9 - 9.1 kW

Mini Sh | RLU

₹<u></u> A

(**(**)) 4.9 - 9.1 kW







## MINI



**STRAIGHT** 

Small fireplace - great effect

The fireplace crackles gently and invites you to linger. With a Mini, you can still create a lively highlight in the smallest room. Because a genuine fire in a fireplace is an upgrade for any ambiance. So this fireplace insert, which is not too big and yet combines functionality and design, will find the perfect space for an unforgettable fire experience even in a corner or on a narrow wall.

In addition, the smart fireplace assistance functions ensure a relaxed fire experience. The electric S-Thermatik NEO, for example, enables the wood to burn efficiently and a underpressure control offers even more safety. With the electric, automatically operating sliding door called S-ESAM, operating the Mini becomes extremely convenient and leaves more time for enjoying the fire.



## SMART FIREPLACE ASSISTANCE FUNCTIONS



S-Thermatik NEO (Combustion control)



S-USI II

(Underpressure control)



S-ESAM

(Automatic sliding door)




S-Kamatik

(Chimney draft control)



S-Vent

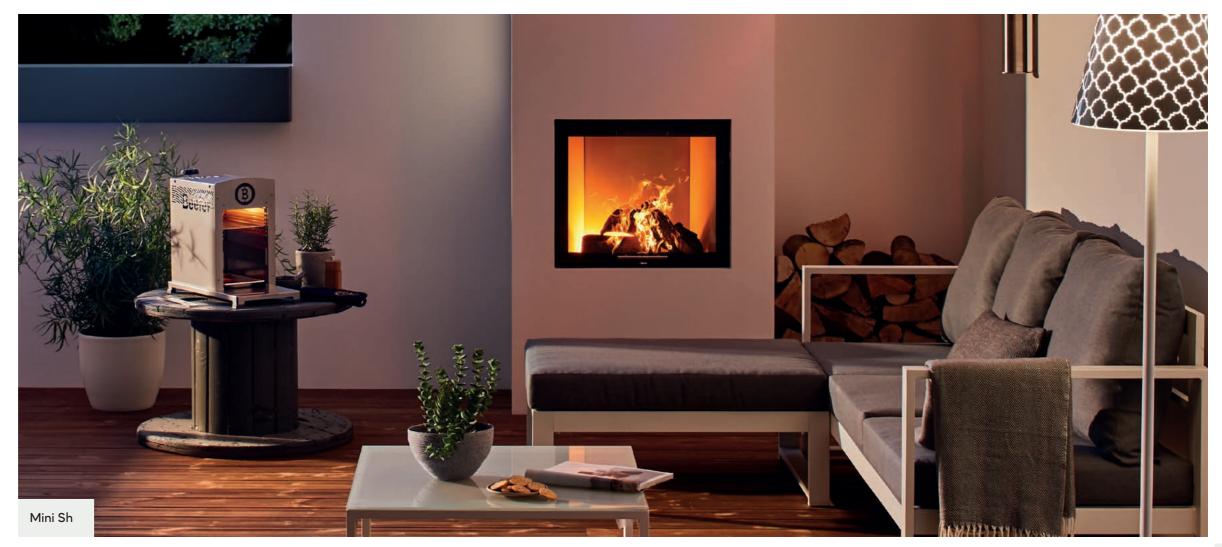

## MINI



L-SHAPED

Simply change the perspective

New insights. For those who want to enjoy the fire again and again in a different way, the L-shape of the Mini is the ideal entry-level format for corner fireplaces. The practical Mini 2L or Mini 2R with self-closing hinged door, for example, is especially suitable for low installation situations. As a convenient Mini 2LRh with an elevating door, the front can even be opened with the S-ESAM electric glass opener if desired.

The L-shape creates a holistically designed ambience for well-being that can be viewed from two sides.











Open, yet separate. If you are looking for the perfect solution to design rooms in a unique way, you will find the answer in the "double sided" Mini. Because the compact fireplace from Spartherm provides a clear view all the way through it. The fireplace insert with its two glasses is cleverly integrated into the architecture.

This creates an almost natural connection between two rooms. Because the warming fire always remains and fascinates from every angle. This allows you to enjoy open perspectives even in compact room situations – for more space and a special fire experience.



#### **ARTE**



**STRAIGHT** 

Arte Bh

The balanced high-format design

A flaming image fascinates.
With the Arte fireplace insert,
extraordinary accents can be
set in a homely ambience. The
impressive high-format design
thereby leaves the flames free
and gives the vertical a slight
advantage. Thus a mighty fire is
staged in all its glory – blazing and
yet tamed.







The Arte can also be supplemented with smart fireplace assistance functions for a relaxed fire experience. Thus, the electric S-Thermatik NEO enables the wood to burn efficiently and is completely in the spirit of sustainability. Equipped with the underpressure control and the mechanical chimney draft control, the Arte offers even more safety.

The electric, automatically operating sliding door called S-ESAM assists with convenient operation and turns time spent by the fireplace into pure relaxation.

## SMART FIREPLACE ASSISTANCE FUNCTIONS



S-Thermatik NEO (Combustion control)



S-USI II (Underpressure control)



S-ESAM | S-ESAM 3.0 (Automatic sliding door)



S-Kamatik | S-Kamatik 2 (Chimney draft control)



S-Vent



With understated elegance, the fire feature is presented in this variant of the Arte from Spartherm. As the two identical fronts form a slim silhouette for the generous combustion chamber. This allows the flames to develop imposingly and show greatness. Because the blazing fire is visible at full height and from two sides in the Arte 2LRh-66.

The sophisticated technology of the firing system also convinces with its impressive performance. As with an output of 6.4 kW, the energy level remains pleasant and does not overheat the room. In the Arte fireplace insert, Spartherm combines innovative technology and unique design to create unforgettable fire enjoyment.

#### **VARIANT**

Arte 2LRh-66





(L) 4.5 - 8.3 kW 7.3 - 13.5 kW NSHF








### **ARTE**



**U-SHAPED** 

Arte U-90h

Share elegantly

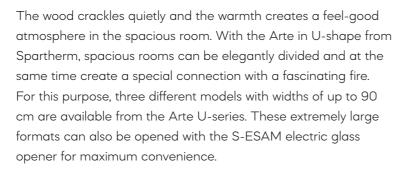



The view from three sides lends a special expressiveness to this extraordinary fireplace insert, which makes a perfect room divider. Because the flames are in front of the wall and are visible from any perspective in the room. They immerse their entire surroundings in a warm, fascinating pattern of light – for a fire experience in its full spaciousness.

#### **VARIANTS**

Arte 3RL-60h



(**仏**) 7.0 - 13.0 kW

Arte 3RL-80h

<u>₹</u> A+

(**L**)) 8.0 - 14.8 kW

Arte 3RL-100h

[≣ A+

(**L**)) 7.7 - 14.3 kW

Arte U-50h

₹<u></u> A+

(**L**)) 6.5 - 12.1 kW

Arte U-70h

<u>₹</u> A+

(*L*)) 8.0 - 14.8 kW

Arte U-90h




(**L**) 9.1 - 16.9 kW








## **ARTE**

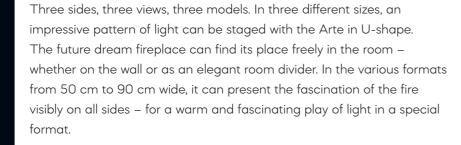

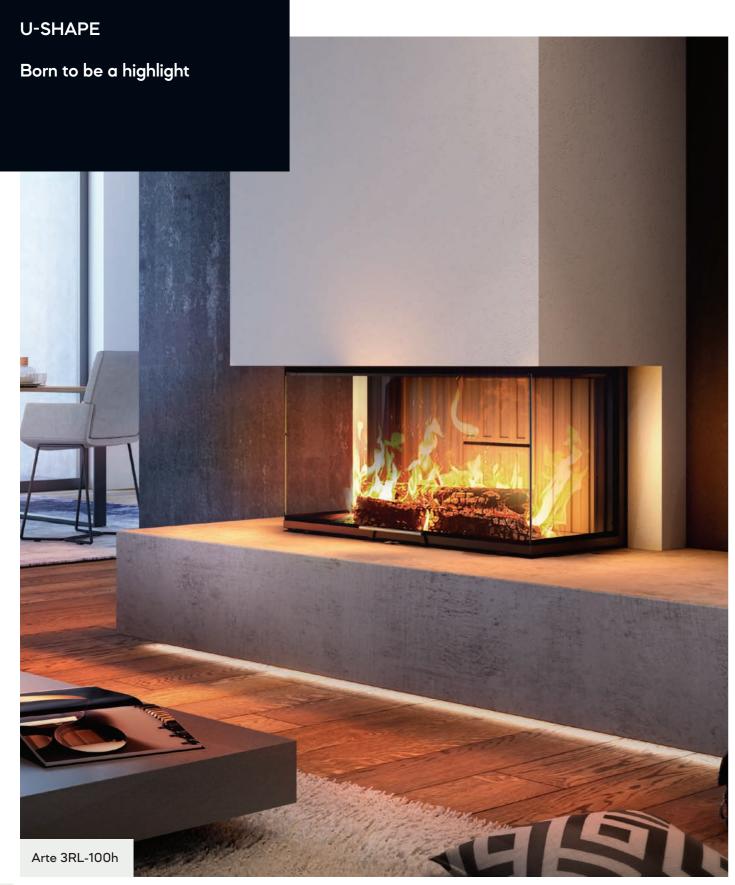






## SPEEDY O

Natural curves

**ROUND** 



To make the time in front of the fireplace insert relaxing, it can be equipped with some smart functions. For example, the practical elevating door is a very convenient solution for adding wood. If desired, this can even be operated electrically with the automatic S-ESAM – simple and easy.

## SMART FIREPLACE ASSISTANCE FUNCTIONS



S-Thermatik NEO (Combustion control)



S-USI II (Underpressure control)



S-ESAM (Automatic sliding door)



S-Kamatik (Chimney draft control)



S-Vent



**VARIANT** 

Speedy Ph

(**L**)) 4.9 - 9.1 kW

**△** A+





## **VARIA**



**STRAIGHT** 

Versatile variants

Blazing, lambent or gently flickering. Fire shows itself in countless facets. Varia fireplace inserts offer a wide range of variants. Each and every version convinces with the balanced door format. It can be freely decided whether the door is opened from the left or the right. An elevating glass is also available, which can even be controlled with the S-ESAM electric door opener if desired.







#### **VARIANTS**

Varia 1V | RLU Varia 1Vh | RLU



(L)) 7.7 - 14.3 kW 11.9 - 21.2 kW NSHF

Varia 1V-87h

**≟** A+

(L)) 6.7 - 12.4 kW 7.6 - 14.2 kW

Varia 1V-100h

**≦** A+

(**(**)) 7.3 - 13.5 kW

Varia Sh | RLU

<u>₹</u> A+

(**L**)) 7.7 - 14.3 kW

Varia AS | RLU Varia ASh | RLU



(仏) 4.9 - 9.1 kW 7.7 - 14.3 kW NSHF

Varia Ah

<u>≦</u> A+

(**L**)) 7.3 - 13.5 kW

Varia Bh | RLU

(**L**)) 7.3 - 13.5 kW

Varia B-120h

(L)) 10.5 - 19.5 kW


Varia M-80h RLU

(**L**)) 6.3 - 11.7 kW







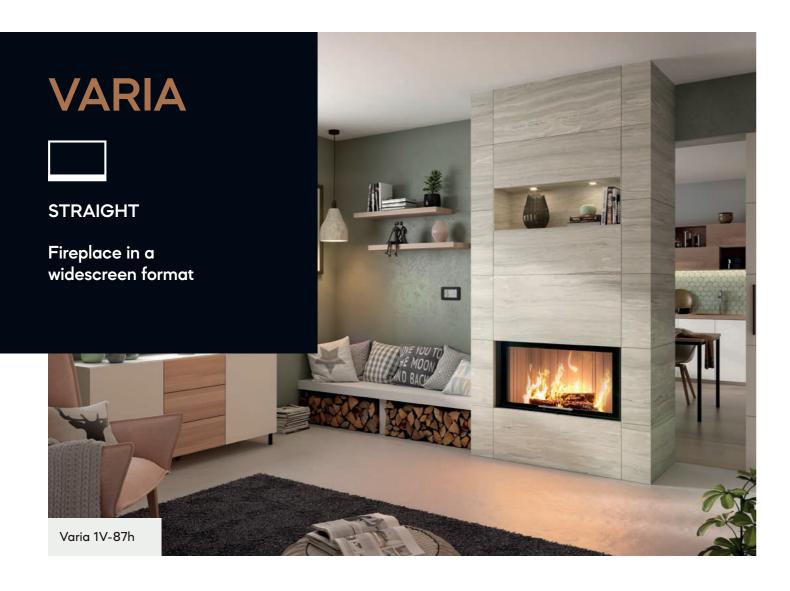





## SMART FIREPLACE ASSISTANCE FUNCTIONS



S-Thermatik NEO (Combustion control)



S-USI II (Underpressure control)



S-ESAM | S-ESAM 3.0 (Automatic sliding door)



S-Kamatik | S-Kamatik 2 (Chimney draft control)



S-Vent

## **VARIA**



**STRAIGHT** 

Varia AS

The Screen of fire

A fire nearly as wide as the horizon. The Varia AS and Varia ASh fireplace inserts impress with a sensational wide format. They have a front width of 75 cm and a height of only 38 cm. In this way, they take up the fascinating dimension of a cinema screen.

These fireplace inserts are also fit for the trendy topic of smart home. With the S-Vent ventilation and the digital S-Thermatik NEO combustion control, a smart assistance package is available that offers more comfort and safety – for a relaxed fire experience.



## **VARIA**



L-SHAPED

Perspectives for fire

Experience a pattern of flames several times over. With its compact corner viewing glass, the Varia L-shape creates a comprehensive view of an impressive fire from two sides. For example, the fireplace insert, which is fired with logs, is a perfect corner solution and allows completely new positions for a fire experience in the room to become reality. Different sized compartments with the openly presented wood supply create even more cosiness for the

also provide their power to additional rooms through warm air. The digital S-Thermatik NEO assists in the correct and, above all, safe handling of the fire.





#### **VARIANTS**

Varia 2L-55 Varia 2R-55



Varia 2L-55h | RLU Varia 2R-55h | RLU



(**L**)) 4.9 - 9.1 kW

Varia 2L-62 Varia 2R-62

**≦** A+

4.8 - 9.0 kW 7.0 - 13.0 kW NSHF

Varia 2L-62h | RLU Varia 2R-62h | RLU

(**L**)) 4.8 - 9.0 kW 7.0 - 13.0 kW NSHF

Varia 2L-68h Varia 2R-68h

**₫** A+

(L)) 6.7 - 12.5 kW 6.9 - 12.9 kW NSHF

Varia 2Lh Varia 2Rh (**L**)) 7.7 - 14.3 kW 8.4 - 15.6 kW NSHF

Varia AS-2Lh Varia AS-2Rh

<u>₹</u> A+

(**(**)) 4.9 - 9.1 kW

Varia 2L-80h Varia 2R-80h **≦** A+

((L)) 7.3 - 13.5 kW


Varia 2L-100h Varia 2R-100h <u>₹</u> A

(**᠘**) 7.7 - 14.3 kW








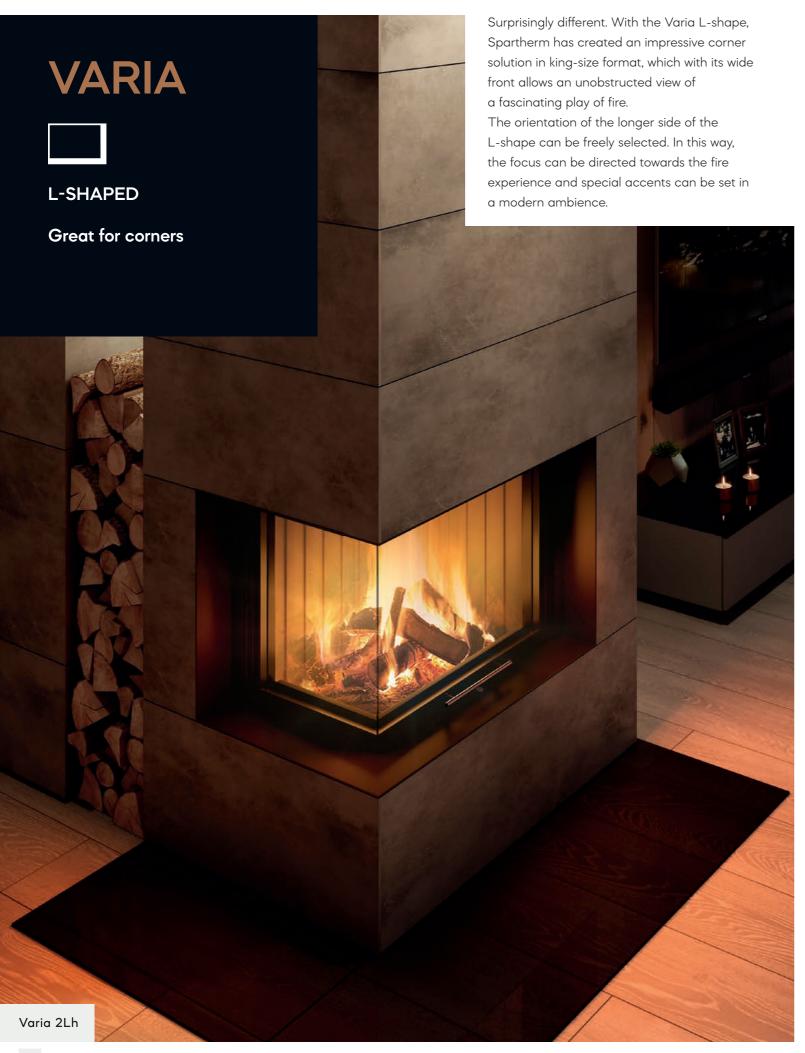






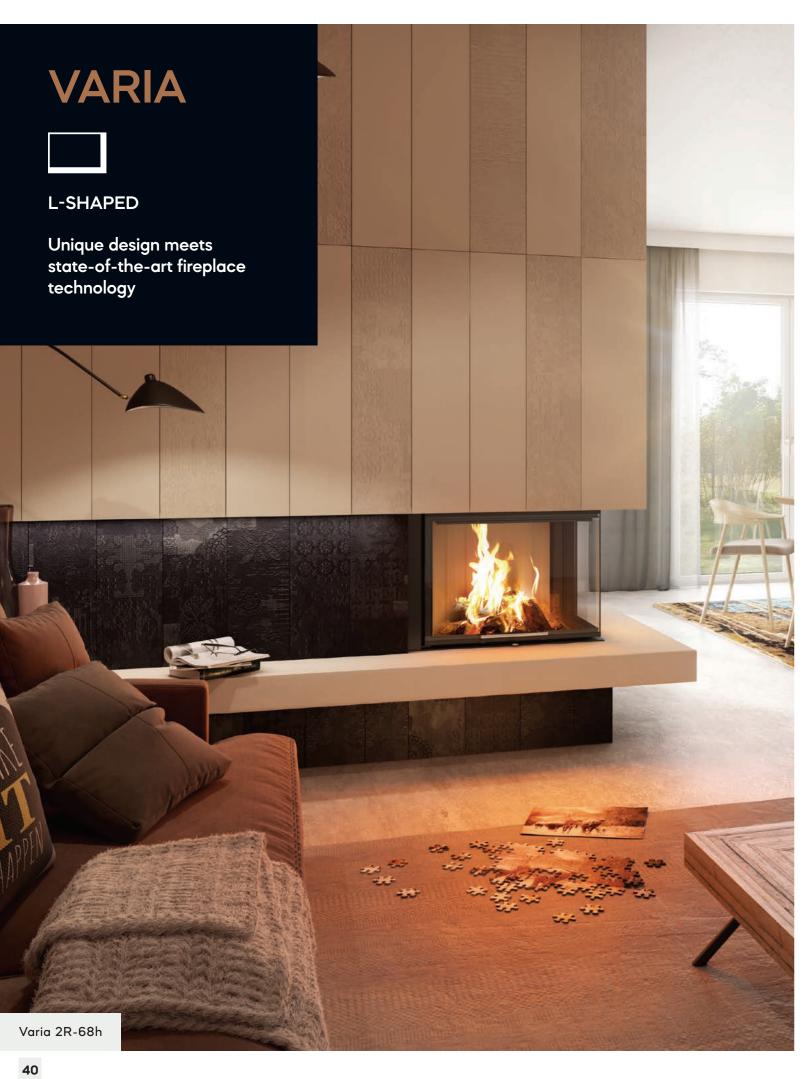





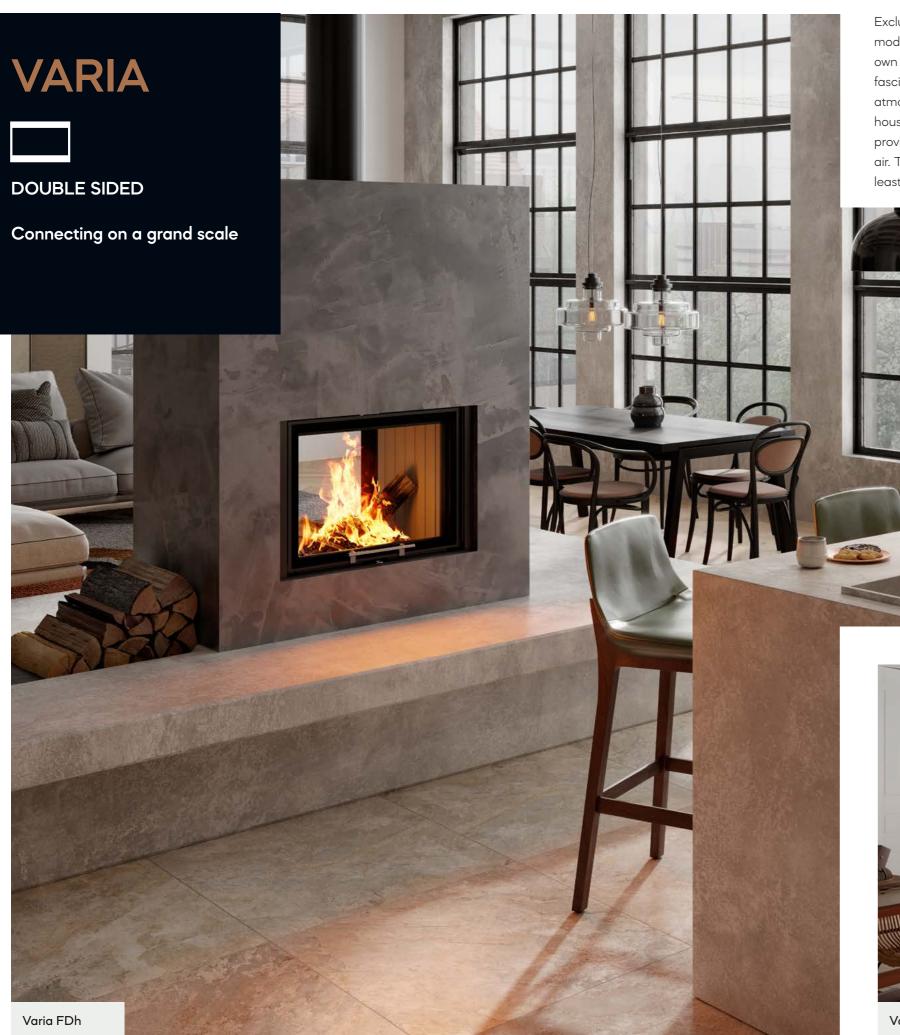

Exclusive and impressive. The Varia double-sided models create a fire experience in a class of its own with their unique design. Thus, a single fire fascinates from two perspectives, while the cosy atmosphere can be felt throughout the entire house. This is because the fireplace inserts also provide their energy in other rooms through warm air. The variants of the fireplace inserts can all at least impress with an energy efficiency class of A.

#### **VARIANTS**

Varia FD | RLU Varia FDh



((L)) 8.1 - 15.1 kW

Varia FD-87h



(仏) 7.4 - 13.8 kW 7.8 - 14.4 kW NSHF

Varia AS-FDh



(L) 4.9 - 9.1 kW 7.7 - 14.3 kW NSHF

Varia A-FDh



(**L**)) 7.3 - 13.5 kW

Varia B-FDh



(**L**)) 7.7 - 14.3 kW














Anyone who enters a spacious room with a Varia double-sided fireplace insert will appreciate the cosy, pleasant atmosphere. Because, on the one hand, the different models inspire with an elegant wide format and, on the other hand, present the fire as a connecting element between two rooms.












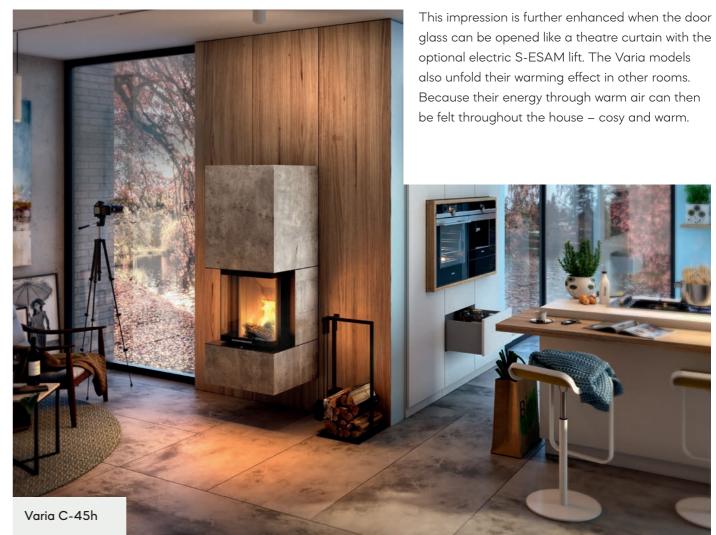

**.** 



The wood in the Varia H<sub>2</sub>O crackles quietly and flares up every now and then. After a while, the cosy warmth in front of the fireplace insert beckons and, with a view of the lambent fire, pure relaxation begins. But these special models of the Varia series do not only light up the eyes thanks to the unique pattern of fire, they also inspire with their technical finesse.

In this way, the innovative H<sub>2</sub>O models produce sustainable and CO<sub>2</sub>-neutral hot water that can be used in all areas of the entire home. This is made possible and supported by the digital S-Thermatik NEO.

In the process, the different variations of the fireplace insert, which are fueled with well-stored logs, always achieve energy efficiency class A in the tests - with the best prospects for the environment.

#### **VARIANTS**

Varia 1V H<sub>2</sub>O Varia 1Vh H<sub>2</sub>O

**₹** A+

(L)) 5.6 - 10.4 kW

Varia 1V H<sub>2</sub>O XL Varia 1Vh H<sub>2</sub>O XL

(**(**)) 6.3 - 11.7 kW

Varia 1V H<sub>2</sub>O XXL A+ Varia 1Vh H<sub>2</sub>O XXL



(ሬ)) 10.5 - 19.5 KW

Varia Ah H<sub>2</sub>O



(**仏**)) 7.3 - 13.5 KW







## VARIA H<sub>2</sub>O



L-SHAPED

Flaming perspectives

Warmth and a feeling of security. That is why a place by the fire has been coveted since time immemorial. The sophisticated L-shape of the Varia H<sub>2</sub>O with its compact corner glass allows a comprehensive view of the flames from two sides. This way, the pattern of fire remains in view at all times. The ingenious corner solution opens up new dimensions for a unique interior design because the fireplace insert can be placed unattached and freely in the room.

All Varia corner fireplace models have another advantage. This is because they can also pass on their power to other rooms through warm air. The digital S-Thermatik NEO assists in handling the fire just right. The waterconducting variant is particularly designed for sustainable consumption of resources. This is because it also generates hot water that is produced in a  $\mathrm{CO_2}$ -neutral way – with the fire of innovation.



## VARIA H<sub>2</sub>O



**DOUBLE SIDED** 

Having perspective

Simply fascinating. With the double-sided Varia H<sub>2</sub>O, the pattern of flames always remains in view. This is because the fireplace insert straightforwardly and clearly connects two rooms with a unique fire and thus creates a new architectural experience.

#### **SMART FIREPLACE ASSISTANCE FUNCTIONS**



S-Thermatik NEO (Combustion control)



S-USI II (Underpressure control)



S-ESAM | S-ESAM 3.0 (automatic sliding door)





S-Kamatik | S-Kamatik 2 (Chimney draft control)




S-Vent

For this purpose, Spartherm has developed different front widths of 67 cm or 87 cm that blend harmoniously into a wall design. The large-format, fully non-reflective lively fire. But the double-sided models of the Varia H<sub>2</sub>O can be adapted to individual needs. This way, additional features make the fire experience even more premium. In addition to a classic swing door, an elevating stove door is also available. For even more convenient operamodels, this one is designed to produce hot water in a sustainable and CO<sub>2</sub>-neutral way.

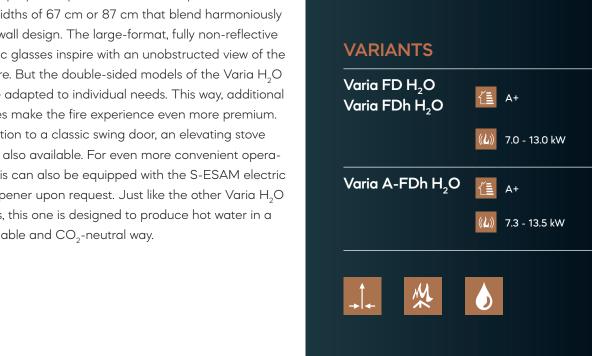

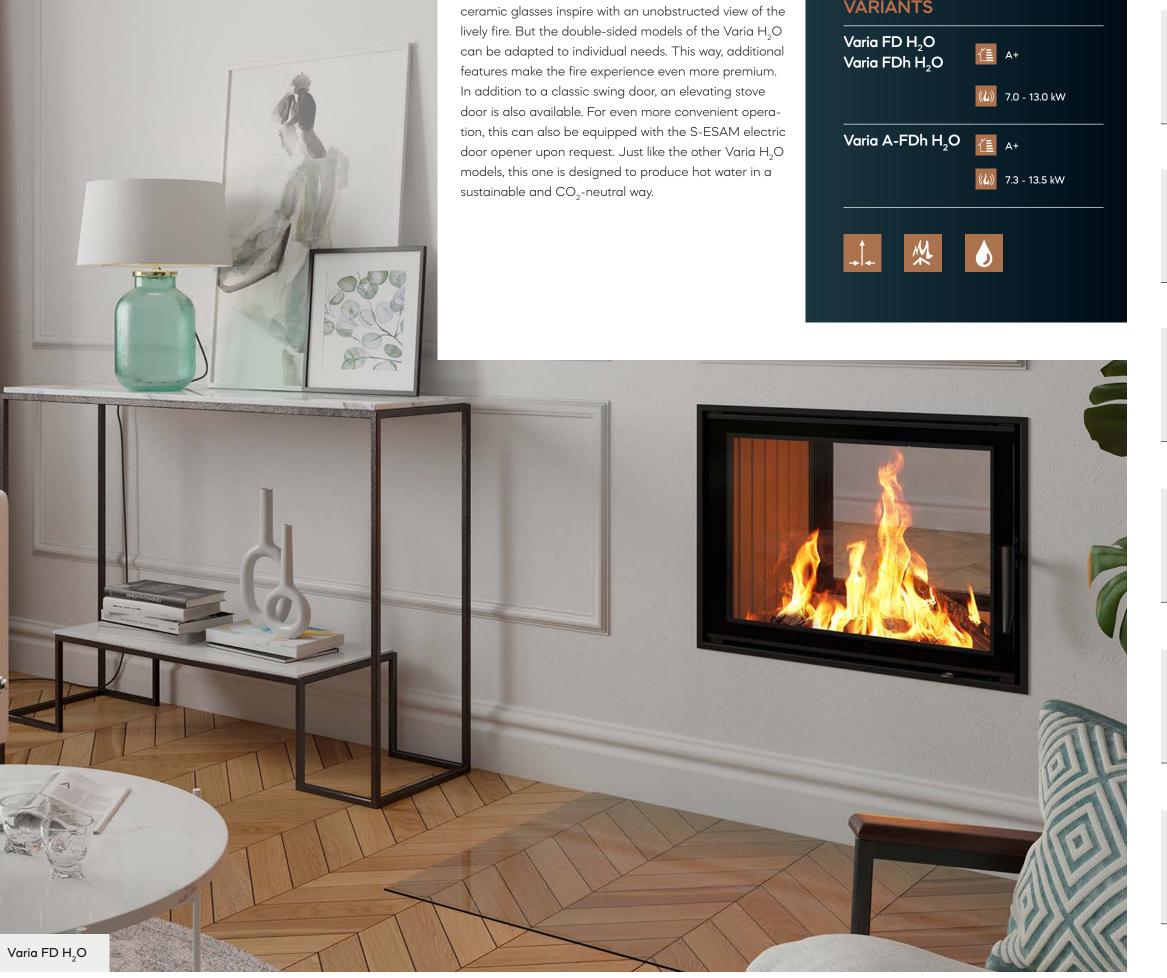

#### **Product overview**

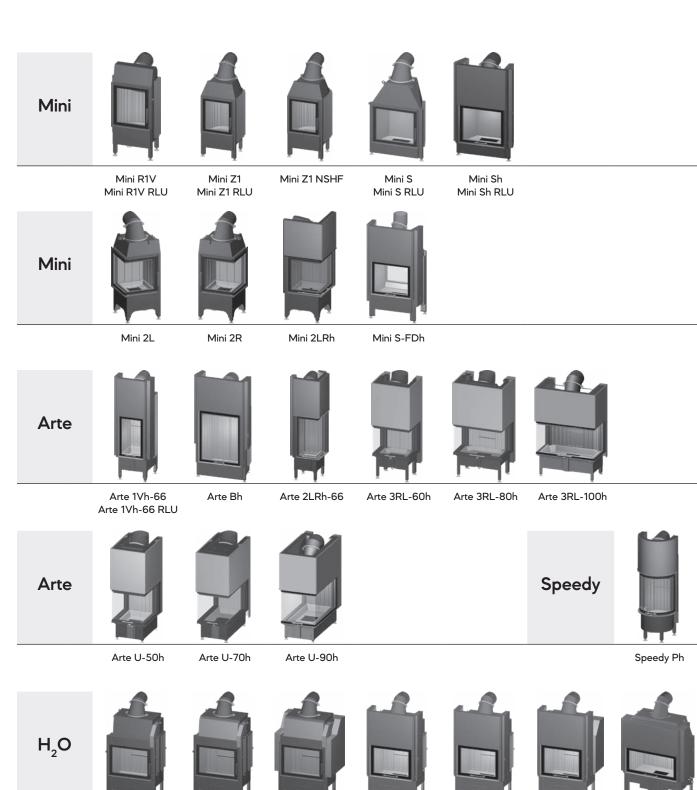





Varia 1Vh H<sub>2</sub>O

Varia 2L-55h

Varia 1V H<sub>2</sub>O

Varia FDh H<sub>2</sub>O Varia A-FD H<sub>2</sub>O



Varia 1Vh H<sub>2</sub>O





Fireplace inserts			Mini R1V	Mini Z1	Mini S	Mini Sh	Varia 1V	Varia 1Vh	Varia 1V-87h	Varia 1V-100h	Varia Sh	
	Doo	Door dimension height		505	505	505	514	512   566	514   574	528	700	623
Dimensions	Doo	r dimension width	mm	438	438	598	606	668	671	875	1006	746
Dime	Doo	r dimension depth	mm	-	-	-	-	-	-	-	-	-
	Flue	gas connection Ø	mm	180	180	180	180	200   180	200   180	200	250   200	200   180
		Energy efficiency class		A+	А	А	А	A+	A+	A+	A+	A+
	Standard	Nominal heat output	kW	5.2	7.0	7.0	7.0	11.0	11.0	9.5	10.4	11.0
	Stan	Output range	kW	4.5-6.8	4.9-9.1	4.9-9.1	4.9-9.1	7.7-14.3	7.7-14.3	6.7-12.4	7.3-13.5	7.7-14.3
		Efficiency	%	80	>78	>78	>78	>80	>80	>80	80	80
Operating performance	with NSHF	Energy efficiency class		A+	A+	-	-	A+	A+	A+	-	-
erforr		Nominal heat output	kW	6.2	10.0	-	-	17.0	17.0	10.9	-	-
ıting p		Output range	kW	4.5-8.1	7.0-13.0	-	-	11.9-21.2	11.9-21.2	7.6-14.2	-	-
Opero		Efficiency	%	>85	>85	-	-	>85	>85	>85	-	-
		Energy efficiency class		-	-	-	-	-	-	-	-	-
	S	Nominal heat output	kW	-	-	-	-	-	ı	-	-	-
		Output range	kW	-	-	-	-	-	-	-	-	-
	Efficiency		%	-	-	-	-	-	-	-	-	-
	Level 2 BlmSchV. 2010 15a B-VG			✓	✓	✓	✓	✓	✓	✓	✓	✓
Tests				✓	√*	<b>√</b> *	√*	✓	✓	✓	✓	✓
Te l	Ecodesign 2022			✓	✓	✓	✓	✓	✓	✓	✓	✓
	Operation with open combustion chamber door			-	✓	✓	✓	-	-	-	-	-
	Wei	ght (approx.)	kg	121	164	142	175	242   248	282   288	350	394	272
Info	Doo	r function		Hinged	Hinged	Hinged	Slide-up	Hinged	Slide-up	Slide-up	Slide-up	Slide-up
	Glaz	ring		Single	Single	Single	Single	Single	Single	Single	Single	Single

* Only complies with 15a 2015 w. AT	att attention: Flue age conn	haight + 160 mm
Offiny Corrigines with 150 2015 W. At	att., attention. I lue gus comi.	neigni i loo illiil

The state of the s												
Firep	lac	e inserts RLU		Mini R1V RLU	Mini Z1 RLU	Mini S RLU	Mini Sh RLU	Varia 1V RLU	Varia 1Vh RLU	Varia AS RLU	Varia ASh RLU	Varia Sh RLU
	Door dimension height mm			512	512	512	514	512   566	514   574	367	370	623
Dimensions	Doo	r dimension width	mm	438	438	598	606	668	671	744	730	746
Dimer	Doo	r dimension depth	mm	-	-	-	-	-	-	-	-	-
	Flue	gas connection Ø	mm	180	180	180	180	200   180	200   180	180	180	200   180
		Energy efficiency class		A+	А	А	А	A+	A+	A+	A+	A+
	Standard	Nominal heat output	kW	5.2	7.0	7.0	7.0	11.0	11.0	7.0	7.0	11.0
	Stan	Output range	kW	4.5-6.8	4.9-9.1	4.9-9.1	4.9-9.1	7.7-14.3	7.7-14.3	4.9-9.1	4.9-9.1	7.7-14.3
		Efficiency	%	80	>78	>78	>78	>80	>80	>80	>80	80
Jance	with NSHF	Energy efficiency class		-	-	-	-	-	-	-	-	-
erform		Nominal heat output	kW	-	-	-	-	-	-	-	-	-
ting p		Output range	kW	-	-	-	-	-	-	-	-	-
Operating performance		Efficiency	%	-	-	-	-	-	-	-	-	-
		Energy efficiency class		-	-	-	-	A+	-	-	-	-
	S	Nominal heat output	kW	-	-	-	-	7.0	-	-	-	-
	0,	Output range	kW	-	-	-	-	4.9-9.1	-	-	-	-
		Efficiency	%	-	-	-	-	>80	-	-	-	-
	Level 2 BlmSchV. 2010		✓	✓	✓	✓	✓	✓	✓	✓	✓	
sts	15a B-VG			✓	-	-	-	1	✓	<b>√</b>	✓	<b>√</b>
Tests	Ecodesign 2022			✓	<b>√</b>	✓	<b>√</b>	1	<b>√</b>	✓	<b>√</b>	✓
		ration with open combustion mber door		-	-	-	-	-	-	-	-	-
	Wei	ght (approx.)	kg	121	164	142	175	217	282	166	209	272
Info	Doo	r function		Hinged	Hinged	Hinged	Slide-up	Hinged	Slide-up	Hinged	Slide-up	Slide-up
	Glaz	zing		Single	Single	Single	Single	Single	Single	Single	Single	Single

Varia AS	Varia ASh	Varia Ah	Varia Bh	Varia B-120h	Arte 1Vh-66	Arte Bh	Mini S-FDh	Varia FD	Varia FDh	Varia FD-87h	Varia AS-FDh	Varia A-FDh
367	370	440	523	523	663	805	514/505	507/507	514/507 574/567	526/518	371/364	440/430
744	730	881	1006	1206	396	656	606/598	668/668	671/668	875/872	730/741	881/877
-	-	-	-	-	-	-	-	-	-	-	-	-
180	180	200   180	250   200	250	180	200   180	200   180	250	250	200	180	250
A+	A+	A+	А	А	A+	А	А	A+	A+	A+	A+	A+
7.0	7.0	10.4	10.4	15.0	6.0	11.0	6.0	11.6	11.6	10.6	7.0	10.4
4.9-9.1	4.9-9.1	7.3-13.5	7.3-13.5	10.5-19.5	4.6-8.6	7.7-14.3	4.5-7.8	8.1-15.1	8.1-15.1	7.4-13.8	4.9-9.1	7.3-13.5
>80	>80	>80	>78	78	>85	>78	>78	80	80	>80	>80	>80
A+	A+	-	-	-	A+	-	-	-	-	A+	A+	-
11.0	11.0	-	-	-	10.4	-	-	-	-	11.1	11.0	-
7.7-14.3	7.7-14.3	-	-	-	7.3-13.5	-	-	-	-	7.8-14.1	7.7-14.3	-
>85	>85	-	-	-	>85	-	-	-	-	>85	>85	-
-	-	-	А	-	-	-	-	-	-	-	-	-
-	-	-	9.0	-	-	-	-	-	-	-	-	-
-	-	-	6.3-11.7	-	-	-	-	-	-	-	-	-
-	-	-	>78	-	-	-	-	-	-	-	-	_
✓	1	✓	✓	✓	✓	1	1	✓	✓	✓	✓	1
✓	1	✓	<b>/*</b>	<b>/*</b>	✓	<b>/*</b>	<b>/*</b>	✓	1	✓	✓	/
✓	✓	✓	✓	✓	✓	1	1	1	1	✓	<b>√</b>	/
✓	<b>✓</b>	-	-	-	-	1	✓	-	-	-	<b>√</b>	✓
166	209	305	350	369	243	287	266	212	265	297	205	314
Hinged	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Hinged	Slide-up	Slide-up	Slide-up	Slide-up
Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Double	Single	Single

Varia M-80h RLU	Varia Bh RLU	Arte 1Vh-66 RLU	Varia FD RLU	Varia 2L-55h / 2R-55h RLU	Varia 2L-62h / 2R-62h RLU
523	523	663	512/512	514	444
802	1006	396	668/668	584	596
-	-	-	-	392	392
200   180	250   200	180	250	180	180
А	А	A+	A+	A+	A+
9.0	10.4	6.6	11.6	7.0	6.9
6.3-11.7	7.3-13.5	4.6-8.6	8.1-15.1	4.9-9.1	4.8-9.0
>78	>78	>85	80	>80	>80
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
✓	✓	✓	✓	✓	✓
-	-	<b>√</b>	✓	1	✓
✓	✓	✓	✓	✓	✓
-	-	-	-	-	-
291	350	243	212	222	206
Slide-up	Slide-up	Slide-up	Hinged	Slide-up	Slide-up
Single	Single	Single	Single	Single	Single

Varia B-FDh	Mini 2L / 2R	Mini 2LRh	Varia 2L-55 / 2R-55	Varia 2L-55h / 2R-55h	Varia 2L-62 / 2R-62	Varia 2L-62h / 2R-62h	Varia 2L-68h / 2R-68h	Varia 2Lh / 2Rh	Varia AS-2Lh / AS-2Rh	Varia 2L-80h / 2R-80h	Varia 2L-100h / 2R-100h	Arte 2LRh-66
523/515	502	505   565	508	514	438	444	501	512   572	370	514	523	663
1006/1002	452	466	571	584	583	596	685	685	730	802	1002	363
-	452	466	379	392	378	392	410	466	358	412	412	363
250	180	180	180	180	180	180	250   200	200   180	200   180	200   180	250   200	180
А	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	А	A+
11.0	7.0	7.0	7.0	7.0	6.9	6.9	9.6	11.0	7.0	10.4	11.0	6.4
7.7-14.3	4.9-9.1	4.9-9.1	4.9-9.1	4.9-9.1	4.8-9.0	4.8-9.0	6.7-12.5	7.7-14.3	4.9-9.1	7.3-13.5	7.7-14.3	4.5-8.3
79	80	80	80	80	>80	>80	>80	80	80	>80	>79	>80
-	-	-	-	-	A+	A+	A+	A+	-	-	-	A+
-	-	-	-	-	10.0	10.0	9.9	12.0	-	-	-	10.4
-	-	-	-	-	7.0-13.0	7.0-13.0	6.9-12.9	8.4-15.6	-	-	-	7.3-13.5
-	-	-	-	-	>85	>85	>85	>85	-	-	-	>85
-	-	-	-	-	-	-	-	А	-	-	-	-
-	-	-	-	-	-	-	-	7.0	-	-	-	-
-	-	-	-	-	-	-	-	4.9-9.1	-	-	-	-
-	-	-	-	-	-	-	-	>78	-	-	-	-
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
√*	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	√*	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	-	-	✓	✓	-	-	-	✓	-	-	✓	-
390	166	199   211	170	200	181	206	310	257   277	199	272	317	186
Slide-up	Hinged	Hinged	Hinged	Slide-up	Hinged	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up
Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single

Fire	plac	e inserts H <sub>2</sub> O		Varia 1V H <sub>2</sub> O	Varia 1V H <sub>2</sub> O XL	Varia 1V H <sub>2</sub> O XXL	Varia 1Vh H <sub>2</sub> O	Varia 1Vh H₂O XL	Varia 1Vh H₂O XXL	Varia Ah H <sub>2</sub> O	Varia FD H <sub>2</sub> O	Varia FDh H <sub>2</sub> O
	Doo	or dimension height	mm	507	507	507	513	513	513	440	507/507	514/507
sions	Doo	or dimension width	mm	668	668	668	671	671	671	881	668/668	671/668
Dimensions	Doo	or dimension depth	mm	-	-	-	-	-	-	-	-	-
	Flue	gas connection Ø	mm	180	200   180	200   180	180	200   180	200   180	200   180	200	200
		Energy efficiency class		A+	A+	A+	A+	A+	A+	A+	A+	A+
	dard	Nominal heat output	kW	8.0  🌢 5.0	9.0   🌢 6.0	15.0   🌢 11.0	8.0   🍐 5.0	9.0   🌢 6.0	15.0   🍐 11.0	10.4   🍐 7.2	10.0   🍐 6.4	10.0   🍐 6.4
	Standard	Output range	kW	5.6-10.4	6.3-11.7	10.5-19.5	5.6-10.4	6.3-11.7	10.5-19.5	7.3-13.5	7.0-13.0	7.0-13.0
		Efficiency	%	>80	>85	>85	>80	>85	>85	>85	>80	>80
ance		Energy efficiency class		-	-	-	-	-	-	-	-	-
erforn	with NSHF	Nominal heat output	kW	-	-	-	-	-	-	-	-	-
Operating performance	with N	Output range	kW	-	-	-	-	-	-	-	-	-
Opera		Efficiency	%	-	-	-	-	-	-	-	-	-
		Energy efficiency class		-	-	-	-	-	-	-	-	-
	S	Nominal heat output	kW	-	-	-	-	-	-	-	-	-
	8	Output range	kW	-	-	-	-	-	-	-	-	-
		Efficiency	%	-	-	-	-	-	-	-	-	-
	Lev	el 2 BlmSchV. 2010		✓	✓	1	✓	✓	1	✓	✓	✓
Tests	15a	B-VG		✓	✓	1	<b>√</b>	✓	1	✓	✓	✓
Ë	Eco	design 2022		✓	✓	✓	✓	✓	✓	✓	✓	✓
		eration with open combustion mber door		-	-	-	-	-	-	-	-	-
	Wei	ght (approx.)	kg	336	341	351	374	379	389	471	424	413
lnfo	Doo	or function		Hinged	Hinged	Hinged	Slide-up	Slide-up	Slide-up	Slide-up	Hinged	Slide-up
	Gla	zing		Single	Double	Double	Single	Double	Double	Double	Double	Double

Varia AS-3RLh	Varia C-45h	Varia Ch	Arte U-50h	Arte U-70h	Arte U-90h	Arte 3RL-60h	Arte 3RL-80h	Arte 3RL-100h	Speedy Ph
400	528	526	508	507	544	507	507	570	570
736	473	651	515	515	562	612	712	1006	523
390	163	310	511	712	911	360	390	448	-
200   180	180	250   200	250   200	250   200	200   250	200   250	200   250	250	180
A+	A+	А	A+	A+	А	A+	A+	А	A+
8.4	8.0	9.0	9.3	11.4	13.0	10.0	11.4	11.0	7.0
5.9-10.9	5.6-10.4	6.3-11.7	6.5-12.1	8.0-14.8	9.1-16.9	7.0-13.0	8.0-14.8	7.7-14.3	4.9-9.1
80	>80	>79	>80	>80	>78	>80	80	>78	>80
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	<b>√</b> *	✓	✓	<b>√</b> *	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-	-	✓	-	-	-	-	-	✓	-
224	230	309	235	342	392	264	337	381	210
Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up	Slide-up
Single	Single	Single	Single	Single	Single	Single	Single	Single	Single

Varia A-FDh H <sub>2</sub> O	Varia 2L-55h / 2R-55h H <sub>2</sub> O	Varia 2Lh / 2Rh H <sub>2</sub> O		
440/430	515	512		
881/877	584	685		
-	392	455		
200	180	200   180		
A+	A+	A+		
10.4   🍐 6.2	7.0  🍐 4.2	10.4   🍐 5.9		
7.3-13.5	4.9-9.1	7.3-13.5		
>80	> 85	>80		
-	-	-		
-	-	-		
-	-	-		
-	-	-		
-	-	-		
-	-	-		
-	-	-		
-	-	-		
✓	✓	<b>√</b>		
✓	-	-		
✓	✓	✓		
-	-	-		
424	384	367		
Slide-up	Slide-up	Slide-up		
Double	Single	Single		

## Varia Sh Varia AS Varia AS RLU





Varia Bh Varia B-120h Varia M-80h RLU Varia Bh RLU



Varia Ah

Varia 2L-55



Varia 2R-55h



















Varia 2L-62

Varia Sh RLU



Varia AS-2Lh



Varia ASh RLU





Varia

Varia

Varia

Varia



Varia A-FDh

Varia AS-FDh



Varia B-FDh













Varia AS-3RLh Varia C-45h



DESIGN YOUR

PERSONAL

FIRE **MOMENT.** 

#### PRODUCT RANGE SPARTHERM





















#### **PRODUCT CONSULTANT**

WHICH FIRE GOES BEST WITH YOUR LIFE?

In just a few steps, find the fireplace insert that exactly matches your wishes!



www.spartherm.com





SPARTHERM® - The fire of your life.



#### SPECIALIST DEALER



- f www.facebook.com/Spartherm
- www.instagram.com/spartherm
- www.youtube.com/sparthermgermany

www.spartherm.com

